



SAW Components

Data Sheet B3582





SAW Components

B3582

Low Loss Filter

345,00 MHz

Data Sheet


Ceramic package **QCC8C**

Features

- RF low-loss filter for remote control receivers
- Package for **S**urface **M**ounted **T**echnology (**SMT**)
- Hermetically sealed ceramic package
- No matching network required for operation at 50 Ω

Terminals


- Ni, gold plated

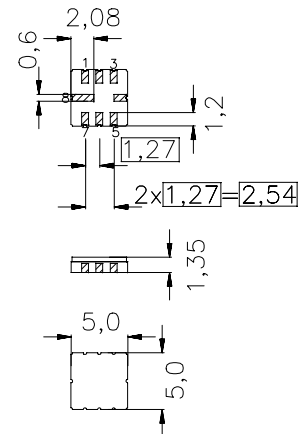

Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 2 Input
- 1,3 Input Ground
- 6 Output
- 5,7 Output Ground
- 4,8 to be grounded

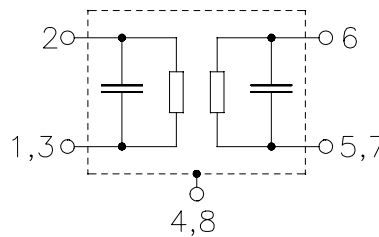

Type	Ordering code	Marking and Package according to	Packing according to
		C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-25/+80	°C	source impedance 50 Ω
Storage temperature range	T_{stg}	-45/+90	°C	
DC voltage	V_{DC}	0	V	
Source power	P_S	0	dBm	



SAW Components

B3582

Low Loss Filter

345,00 MHz

Data Sheet

Characteristics


Reference temperature: $T_A = 25\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	345,00	—	MHz
Maximum insertion attenuation					
	344,60 ... 345,40 MHz α_{max}	—	2,3	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	344,60 ... 345,40 MHz	—	0,3	1,3	dB
Relative attenuation (relative to α_{max})	α_{rel}				
	10,00 ... 320,00 MHz	50	60	—	dB
	320,00 ... 325,00 MHz	50	55	—	dB
	325,00 ... 333,50 MHz	35	40	—	dB
	333,50 ... 335,00 MHz	53	58	—	dB
	335,00 ... 338,00 MHz	40	45	—	dB
	351,00 ... 362,00 MHz	23	28	—	dB
	362,00 ... 370,00 MHz	42	47	—	dB
	370,00 ... 700,00 MHz	50	55	—	dB
	700,00 ... 1000,00 MHz	32	42	—	dB
Temperature coefficient of frequency	TC_f	—	-30	—	ppm/K




Data Sheet

Transfer function

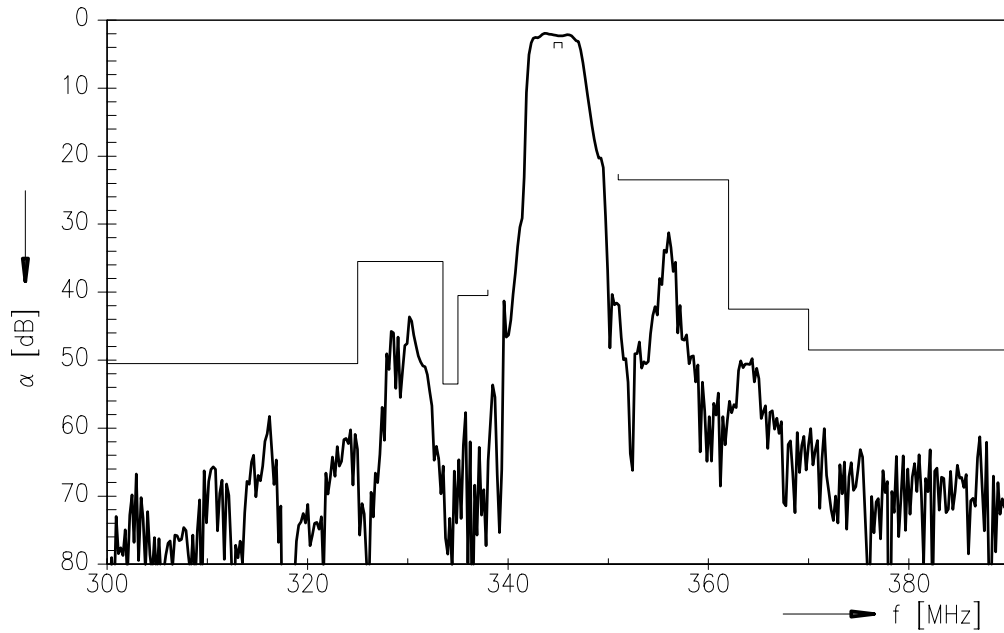

Transfer function (wideband)

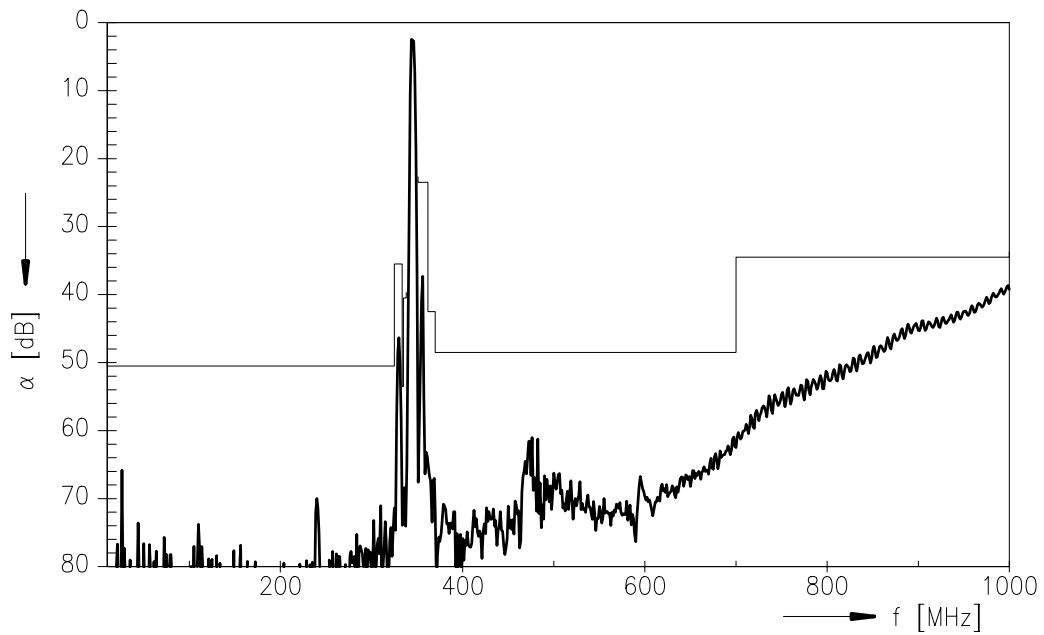



SAW Components

B3582

Low Loss Filter

345,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE AE PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.