


COIL: @ 25°C  
 RESISTANCE 390 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 15.5 VDC @ 25°C  
 MUST RELEASE 1.8 VDC @ 25°C

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C


NOTES: OPERATE & RELEASE TIME 5 MS MAX.  
CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

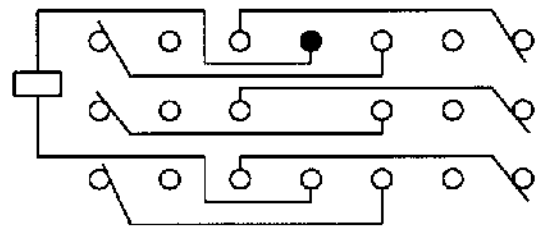

CONTACT RATING: LOW LEVEL TO  
2 AMP / 28 VDC

DR. R.B. 10/6/95 CK. 10/6/95 JAB

 COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE "SS" RELAY

SSAW-6C-24B