


Capacitor, Ceramic, 0.01 uF, +/-10% Tol, 100 V, COG, Lead Spacing=0.2"

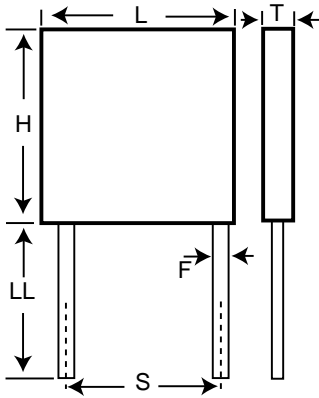

General Information	
Supplier:	KEMET
Application:	200C
Part Type Description:	Commercial, High Temperature
Temperature Coefficient:	COG
Body Type:	Radial Molded
Lead Type:	Wire Leads
Termination Type:	Gold (Au)
RoHS:	No

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.62	MAX
H	7.62	MAX
T	2.54	MAX
S	5.08	+/-0.76
LL	31.75	MIN
F	0.508	+/-0.051

Specifications	
Capacitance:	0.01 uF
Voltage:	100 V
Tolerance:	+/-10%
Temperature Range:	-55/+200C
Failure Rate:	N/A
Testing:	Standard
Dissipation Factor:	0.15%
Insulation Resistance:	100 GOhm
Dielectric Strength:	250 V

Packaging Specifications	
Package Kind:	Bulk
Package Type:	Bag
Package Quantity:	1

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.