


# SMD Power Inductor CDH30D14D



Halogen  
Free



## Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 3.15 × 3.2 × 1.5 mm Max.
- Product weight: 40mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 4000pcs per reel


## Applications

- Ideally used in cell phone, PDA, DVC and DSC.

## Dimension - [mm]

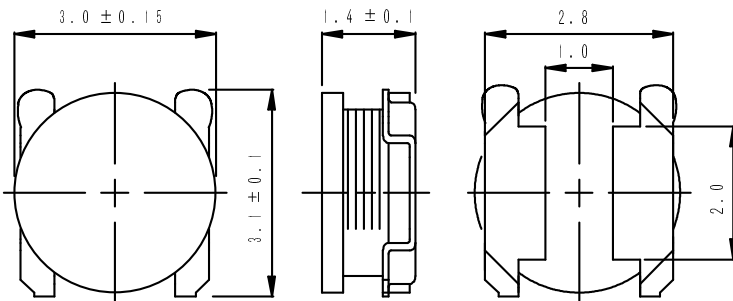

## Land pattern and Schematics - [mm]

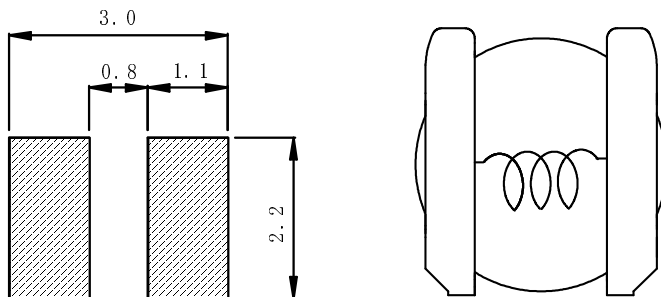

# SMD Power Inductor CDH30D14D



## Electrical Characteristics

Part No.	Stamp	Inductance ( $\mu$ H) [Within] ※1	D.C.R. (m $\Omega$ ) [Within] (at 20°C)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at20°C)	(at100°C)	
CDH3ØD14DHF-1RØNC	A	1.0 ±30%	48 ±25%	2.66	2.25	2.20
CDH3ØD14DHF-1R6NC	B	1.6 ±30%	66 ±25%	2.19	1.83	1.82
CDH3ØD14DHF-2R2NC	C	2.2 ±30%	87 ±25%	1.89	1.53	1.57
CDH3ØD14DHF-3R3MC	D	3.3 ±20%	121 ±20%	1.53	1.28	1.28
CDH3ØD14DHF-4R7MC	E	4.7 ±20%	206 ±20%	1.23	1.05	1.00
CDH3ØD14DHF-6R8MC	F	6.8 ±20%	271 ±20%	1.05	0.90	0.80
CDH3ØD14DHF-1ØØMC	G	10 ±20%	408 ±20%	0.89	0.74	0.68
CDH3ØD14DHF-15ØMC	H	15 ±20%	613 ±20%	0.68	0.59	0.51

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.









※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDH30D14D



## Saturation Current & Temperature Rise Graph



— L (20°C) — L (105°C) —  $\Delta T$

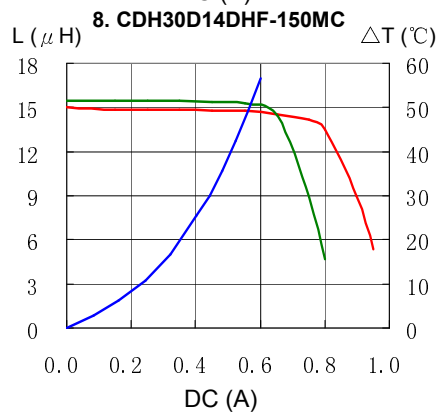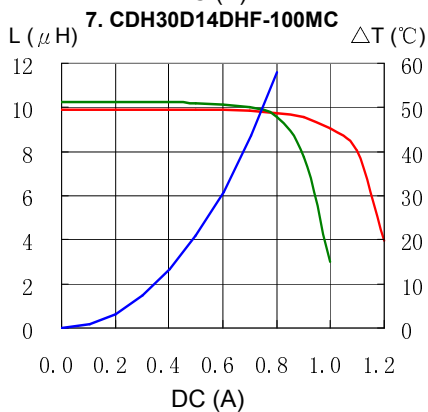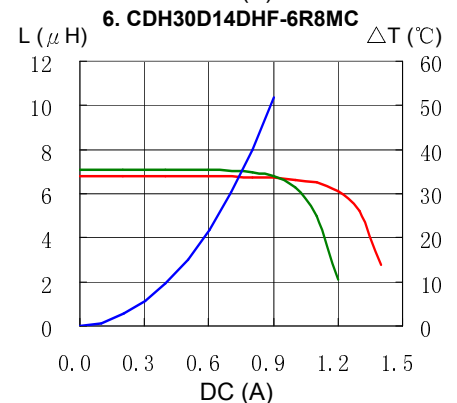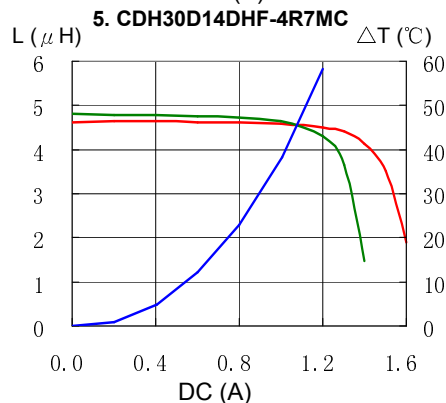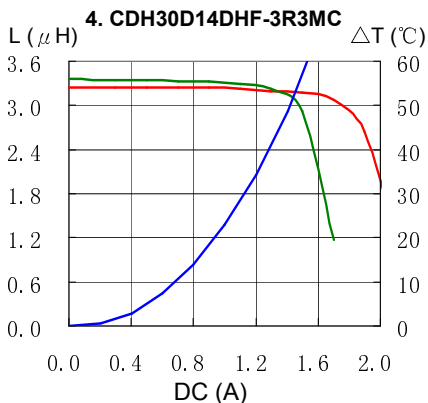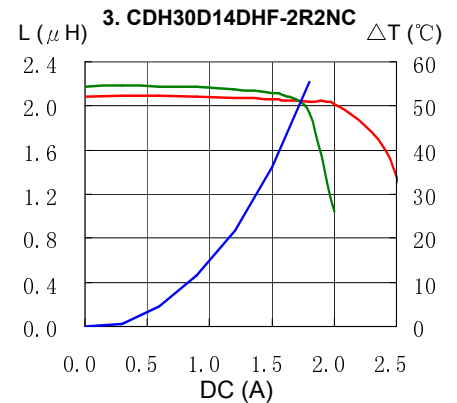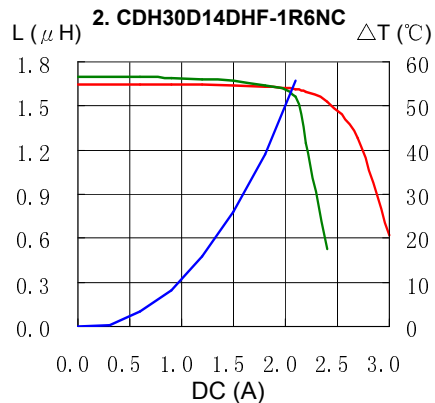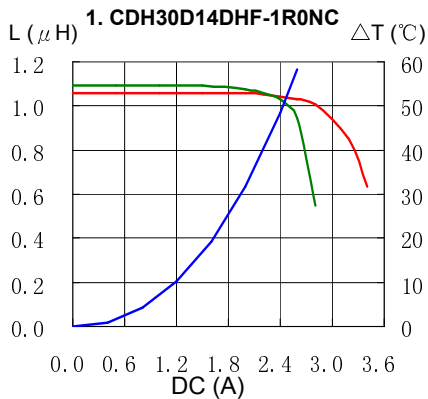

# SMD Power Inductor CDH30D14D



## Solder Reflow Condition

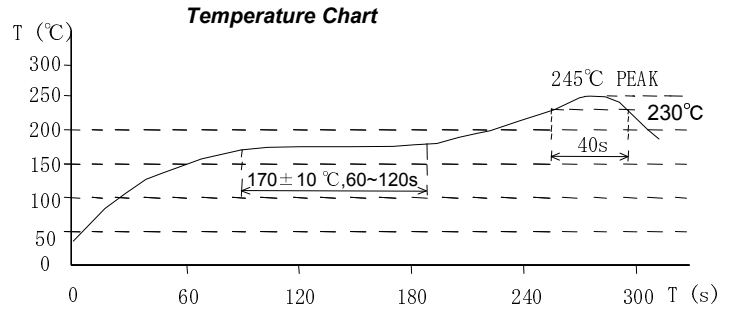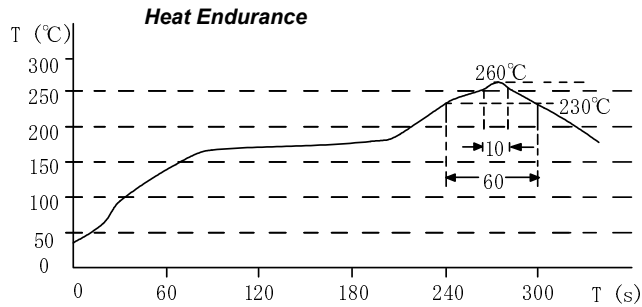

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)